





BTE88 - BTE46


Commerciale



Dimensionale

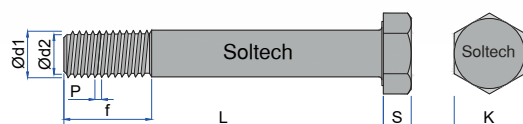

Resistenze

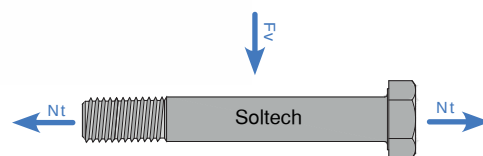

Ø d1	L	Ø d2	K	P	Lunghezza filetto			S	A resist	4.6		8.8	
bullone	mm	mm	mm	mm	L ≤ 125mm	125 < L ≤ 200mm	L > 200mm	mm	mm²	trazione	taglio	trazione	taglio
-	-	-	-	-	f	f	-	-	d1	Nt,rk [kN]	Fv,rk [kN]	Nt,rk [kN]	Fv,rk [kN]
Ø 8	-	6,47	13	1,25	22	28	-	5,30	36,60	-	8,78	23,42	17,57
Ø 10	-	8,16	17	1,50	26	32	45	6,40	58,00	18,56	3,92	37,12	27,84
Ø 12	40-500	9,85	19	1,75	30	36	49	7,50	84,30	26,98	20,23	53,95	40,46
Ø 16	40-600	13,52	24	2,00	38	44	57	10,00	157,00	50,24	37,68	100,48	75,36
Ø 20	40-600	16,93	30	2,50	46	52	65	12,50	245,00	78,40	58,80	156,80	117,60
Ø 24	40-600	20,32	36	3,00	54	60	73	15,00	353,00	112,96	84,72	225,92	169,44

* fornibili su richiesta