

BTT > Bullone testa tonda quadro sottotesta DIN 603 cl. 4.6



MATERIALE

4.6

Z.E.

CAMPI DI UTILIZZO




Commerciale		Dimensionale		
Gamma	Q.tà*	D	L	f
Codice	N°	Ø	mm	mm
11510040	100	10	40	26
11510050	100	10	50	26
11510060	100	10	60	26
11510070	100	10	70	26
11510080	100	10	80	26
11510090	100	10	90	26
11510100	100	10	100	26
11510110	50	10	110	26
11510120	50	10	120	26
11510130	50	10	130	32
11510140	50	10	140	32
11510150	50	10	150	32
11510160	50	10	160	32
11510170	50	10	170	32
11510180	50	10	180	32
11510200	50	10	200	32
11510220	25	10	220	32
11510240	25	10	240	32
11510260	25	10	260	32
11510280	25	10	280	32
11510300	25	10	300	32

* per confezione (articoli fornibili anche singolarmente)

Commerciale		Dimensionale		
Gamma	Q.tà*	D	L	f
Codice	N°	Ø	mm	mm
11512040	100	12	40	30
11512050	100	12	50	30
11512060	100	12	60	30
11512070	100	12	70	30
11512080	50	12	80	30
11512090	50	12	90	30
11512100	50	12	100	30
11512110	50	12	110	30
11512120	50	12	120	30
11512130	50	12	130	36
11512140	50	12	140	36
11512150	25	12	150	36
11512160	25	12	160	36
11512170	25	12	170	36
11512180	25	12	180	36
11512200	25	12	200	36
11512220	25	12	220	36
11512240	25	12	240	36
11512260	25	12	260	36
11512280	25	12	280	36
11512300	25	12	300	36

* per confezione (articoli fornibili anche singolarmente)

SCHEMA TECNICA BULLONI TESTA TONDA QUADRO SOTTOTESTA cl. 4.6

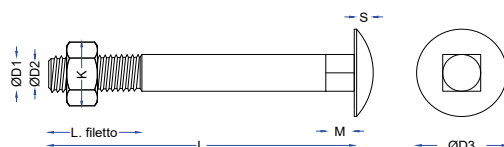

Dimensionale									Tecnico			
Bullone	K dado	D1	D2	D3	S	M	P	Ares	cl. 4.6			
-	[mm]	Ø [mm]	Ø [mm]	Ø [mm]	[mm]	[mm]	[mm]	[mm ²]	f _{y,k} [N/mm ²]	f _{u,k} [N/mm ²]	trazione N _{T,Rk} [kN]	taglio F _{V,Rk} [kN]
M 10	17	10	8,38	25	5	6	1,50	58,00	240	400	18,21	12,14
M 12	19	12	10,11	30	6	8	1,75	84,30			33,91	22,61

Valori caratteristici secondo NTC 2018.