
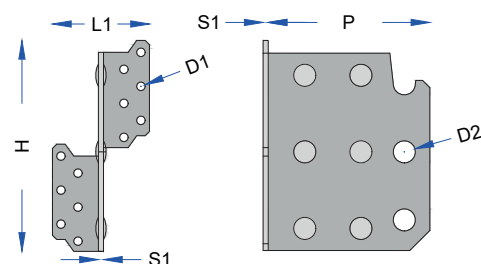


LL > Ancoraggio a scomparsa legno legno

S250
GD

Commerciale		Dimensionale					
Gamma	Q.tà	H	P	L1	S1	D1	D2
Codice	nr	mm	mm	mm	mm	N x Ø	N x Ø
1991101	25	84	98	57	3	8 x Ø5	2 x Ø13
1991102	25	124	98	57	3	12 x Ø5	3 x Ø13
1991103	25	164	98	57	3	16 x Ø5	4 x Ø13
1991104	25	204	98	57	3	20 x Ø5	5 x Ø13
1991105	25	244	98	57	3	24 x Ø5	6 x Ø13

Tecnico

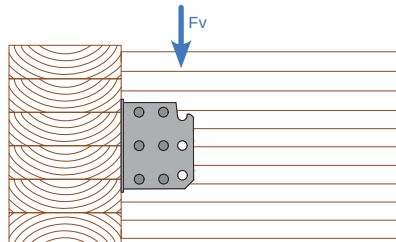

LL > Valori statici con chiodo Anker CK 4 x 60

Gamma	Base trave secondaria	Altezza trave (minima)	Ancoraggi trave principale (D1)		Spinotti calibrati (D2)		Resistenza a taglio
Codice	mm x mm	mm	N°	Ø x mm	N°	Ø x mm	Fv,rk [kN]
1991101 (h = 84 mm)	60	108	8	Ø4 x 60	2	Ø12 x 40	6,2
	80	108	8	Ø4 x 60	2	Ø12 x 60	6,4
	100	108	8	Ø4 x 60	2	Ø12 x 80	6,8
	120	108	8	Ø4 x 60	2	Ø12 x 100	7,4
1991102 (h = 124 mm)	60	144	12	Ø4 x 60	3	Ø12 x 40	12,1
	80	144	12	Ø4 x 60	3	Ø12 x 60	12,5
	100	144	12	Ø4 x 60	3	Ø12 x 80	13,4
	120	144	12	Ø4 x 60	3	Ø12 x 100	14,6
1991103 (h = 164 mm)	60	180	16	Ø4 x 60	4	Ø12 x 40	19,4
	80	180	16	Ø4 x 60	4	Ø12 x 60	20,0
	100	180	16	Ø4 x 60	4	Ø12 x 80	21,4
	120	180	16	Ø4 x 60	4	Ø12 x 100	22,5
19911014 (h = 204 mm)	100	216	20	Ø4 x 60	5	Ø12 x 80	28,8
	120	216	20	Ø4 x 60	5	Ø12 x 100	31,4
1991105 (h = 244 mm)	120	252	24	Ø4 x 60	6	Ø12 x 100	38,8