
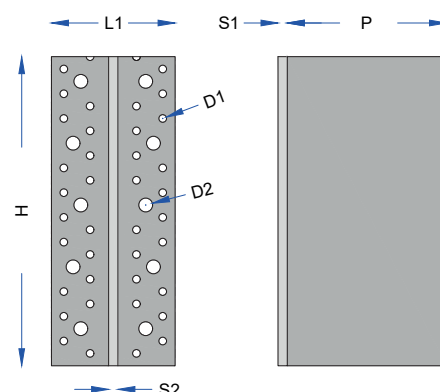


AL80 > Ancoraggio in lega di alluminio base 80 m m

Alu



Commerciale

Dimensionale

Gamma	Q.tà	H	L 1	P	S 1	S 2	D1	D2
Codice	nr	mm	mm	mm	mm	mm	N x Ø	N x Ø
211080ALU	25	80	80	109,4	6,0	6,0	12 x Ø5	4 x Ø9
211120ALU	25	120	80	109,4	6,0	6,0	22 x Ø5	6 x Ø9
211160ALU	25	160	80	109,4	6,0	6,0	30 x Ø5	8 x Ø9
211200ALU	15	200	80	109,4	6,0	6,0	38 x Ø5	10 x Ø9
211240ALU	15	240	80	109,4	6,0	6,0	46 x Ø5	12 x Ø9
2112200ALU	1	2200	80	109,4	6,0	6,0	362 x Ø5	110 x Ø9

Tecnico

AL80 > Valori statici con chiodo Anker **CK 4 x 60** - fissaggio su pilastro in legno

Gamma	Base trave secondaria	Altezza trave (minima)	Ancoraggi trave principale (D1)		Vite autoperforante a perno (D2)		Resistenza a taglio
Codice	mm	Ø x mm	N°	Ø x mm	N°	Ø x mm	Fv,rk [kN]
211080ALU	120	120	8	Ø4 x 60	2	Ø7 x 113	5,3
211120ALU	120	160	12	Ø4 x 60	3	Ø7 x 113	10,0
211160ALU	120	200	16	Ø4 x 60	4	Ø7 x 113	14,2
211200ALU	120	240	20	Ø4 x 60	5	Ø7 x 113	20,0
211240ALU	120	280	24	Ø4 x 60	6	Ø7 x 113	25,3

AL80 > Valori statici con chiodo Anker **CK 4 x 60** - fissaggio su trave in legno

211080ALU	120	120	14	Ø4 x 60	3	Ø7 x 113	9,8
211120ALU	120	160	22	Ø4 x 60	4	Ø7 x 113	19,0
211160ALU	120	200	30	Ø4 x 60	5	Ø7 x 113	26,8
211200ALU	120	240	38	Ø4 x 60	7	Ø7 x 113	37,9
211240ALU	120	280	46	Ø4 x 60	9	Ø7 x 113	48,2

AL80 > Valori statici con ancorante **VE10-90** - fissaggio su C.A.

211080ALU	120	120	2	Ø10 x 90	2	Ø7 x 113	6,9
211120ALU	120	160	3	Ø10 x 90	3	Ø7 x 113	11,4
211160ALU	120	200	4	Ø10 x 90	4	Ø7 x 113	16,0
211200ALU	120	240	5	Ø10 x 90	5	Ø7 x 113	20,6
211240ALU	120	280	6	Ø10 x 90	6	Ø7 x 113	25,2

AL80 > Valori statici barre filettate **BF481** + ancorante chimico **GF400PLUS** - fissaggio su C.A.

211080ALU	120	120	4	Ø8 x 110	3	Ø7 x 113	12,2
211120ALU	120	160	5	Ø8 x 110	4	Ø7 x 113	20,3
211160ALU	120	200	6	Ø8 x 110	5	Ø7 x 113	28,4
211200ALU	120	240	7	Ø8 x 110	7	Ø7 x 113	36,5
211240ALU	120	280	8	Ø8 x 110	9	Ø7 x 113	44,6