


SPC > Spinotti calibrati

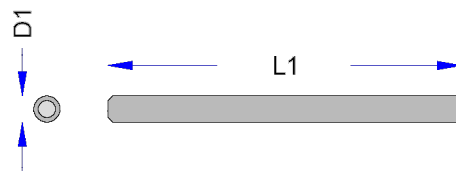

Z.E. S235 S355 CE

SOLTECH
 Soluzioni Tecniche per L'Edilizia in Legno S.R.L.


Classe di duttilità

Commerciale		Dimensionale		
Gamma	Q.tà	D1	L	Acciaio
Codice	nr	Ø	mm	-
13008040	100	8	40	S 235
13008050	100	8	50	S 235
13008060	100	8	60	S 235
13008070	100	8	70	S 235
13008080	100	8	80	S 235
13008090	100	8	90	S 235
13008100	100	8	100	S 235
13008110	100	8	110	S 235
13008120	100	8	120	S 235
13008130	100	8	130	S 235
13008140	100	8	140	S 235
13008150	100	8	150	S 235
13008160	100	8	160	S 235
13008170	100	8	170	S 235
13008180	100	8	180	S 235
13008190	100	8	190	S 235
13008200	100	8	200	S 235
13012040	100	12	40	S 235
13012050	100	12	50	S 235
13012060	100	12	60	S 235
13012070	100	12	70	S 235
13012080	100	12	80	S 235
13012090	100	12	90	S 235
13012100	100	12	100	S 235
13012110	100	12	110	S 235
13012120	100	12	120	S 235
13012130	100	12	130	S 235
13012140	100	12	140	S 235
13012150	100	12	150	S 235



Su richiesta sono disponibili anche in
Acciaio S355 zincati

Commerciale		Dimensionale		
Gamma	Q.tà	D1	L	Acciaio
Codice	nr	Ø	mm	-
13012160	100	12	160	S 235
13012170	100	12	170	S 235
13012180	100	12	180	S 235
13012190	100	12	190	S 235
13012200	100	12	200	S 235
13012220	100	12	220	S 235
13012240	100	12	240	S 235
13012260	100	12	260	S 235
13012280	100	12	280	S 235
13012300	100	12	300	S 235
13012320	50	12	320	S 235
13012340	50	12	340	S 235
13012360	50	12	360	S 235
13012380	50	12	380	S 235
13012400	50	12	400	S 235
130121000	50	12	1000	S 235
13016080	50	16	80	S 235
13016090	50	16	90	S 235
13016100	50	16	100	S 235
13016110	50	16	110	S 235
13016120	50	16	120	S 235
13016130	50	16	130	S 235
13016140	50	16	140	S 235
13016150	50	16	150	S 235
13016160	50	16	160	S 235
13016170	50	16	170	S 235
13016180	50	16	180	S 235
13016190	50	16	190	S 235
13016200	50	16	200	S 235


SPC > Spinotti calibrati

Commerciale		Dimensionale		
Gamma	Q.tà	D1	L	Acciaio
Codice	nr	Ø	mm	-
13016220	50	16	220	S 235
13016240	50	16	240	S 235
13016260	50	16	260	S 235
13016280	50	16	280	S 235
13016290	50	16	290	S 235
130160300	50	16	300	S 235
13016320	50	16	320	S 235
13016340	50	16	340	S 235
13016360	50	16	360	S 235
13016380	50	16	380	S 235
13016400	50	16	400	S 235
13016420	50	16	420	S 235
13016440	50	16	440	S 235
13016460	50	16	460	S 235
13016480	50	16	480	S 235
13016500	50	16	500	S 235
130161000	50	16	1000	S 235
13020120	50	16	120	S 235
13020130	50	16	130	S 235
13020140	50	16	140	S 235
13020150	50	16	150	S 235




Rottura per connessioni acciaio - legno


Rottura tipo 1



Rottura tipo 2




Rottura tipo 3




Rottura per connessioni legno - legno

Rottura tipo 1



Rottura tipo 2



Commerciale		Dimensionale		
Gamma	Q.tà	D1	L	Acciaio
Codice	nr	Ø	mm	-
13020160	100	12	160	S 235
13020170	100	12	170	S 235
13020180	100	12	180	S 235
13020190	100	12	190	S 235
13020200	100	12	200	S 235
13020220	100	12	220	S 235
13020240	100	12	240	S 235
13020260	100	12	260	S 235
13020280	100	12	280	S 235
13020300	100	12	300	S 235
13020320	50	12	320	S 235
13020240	50	12	340	S 235
13020360	50	12	360	S 235
13020380	50	12	380	S 235
13020400	50	12	400	S 235
13020420	50	12	420	S 235
13020440	50	16	440	S 235
13020460	50	16	460	S 235
13020480	50	16	480	S 235
13020500	50	16	500	S 235
130201000	50	16	1000	S 235

Tecnico

SPC > Caratteristiche meccaniche

Tipo di acciaio	f _{u,k}	f _{y,k}	My,k Ø 8-12-16-20
-	N/mm ²	N/mm ²	Nm
S 235	360	235	24,1 - 68,1 - 145,9 - 260,7
S 355	510	355	34,1 - 97,9 - 206,7 - 369,3

SPC > Distanze minime secondo EC 5

Distanze e interassi	(mm)
A 1	(3 + 4 cos α) d
A 2	3 d
A 3,t (estremità sollecitata)	7 d
A 3,c (estremità non sollecitata)	3 d
A 4,t (bordo sollecitato)	(2 + 2 sen α) d (<3d)
A 4,c (bordo non sollecitato)	3 d

