



WT > Vite Torx da costruzione doppio filetto



Z.G.

D.R.



Commerciale

Dimensionale

Gamma	Q.tà	d 1	L	Lf
Codice	nr	Ø mm	mm	mm
173S65065	100	6,5	65	28
173S65090	100	6,5	90	40
173S65130	100	6,5	130	40
173S65160	100	6,5	160	65
173S82160	100	8,2	160	65
173S82190	100	8,2	190	80
173S82220	100	8,2	220	95
173S82245	100	8,2	245	107
173S82275	50	8,2	275	107
173S82300	50	8,2	300	135
173S82330	50	8,2	330	135

Testa cilindrica con impronta Torx


Doppio filetto per maggiore resistenza a estrazione

Filetto a passo stretto

Tecnico

WT > Dimensionale

Descrizione		Diametro nominale [d1]	
		6,5 mm	8,2 mm
Diametro testa	[dk]	8,0 mm	10,0 mm
Diametro nocciolo	[d2]	4,0 mm	5,4 mm
Diametro gambo	[ds]	4,6 mm	6,3 mm
Impronta Torx	[Tx]	T-30	T-40
Momento di snervamento	[My,k]	12,7 N m	19,5 N m
Resistenza caratteristica di snervamento	[fy,k]	990 N/m m2	870 N/m m2

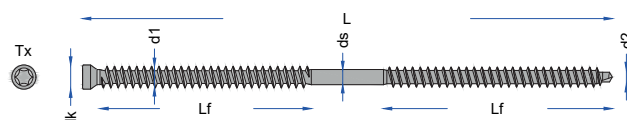

WT > Valori statici

Gamma					
	Codice	d1 x L	Nt,rk [kN]	Fv,rk [kN]	Fv,rk [kN]
	173S65065	6,5 x 65	2,63	2,00	1,86
	173S65090	6,5 x 90	3,75	2,59	2,65
	173S65130	6,5 x 130	3,75	2,59	2,65
	173S65160	6,5 x 160	6,10	3,18	4,31
	173S82160	8,2 x 160	7,70	4,34	5,44
	173S82190	8,2 x 190	9,47	4,78	6,70
	173S82220	8,2 x 220	11,25	4,83	7,95
	173S82245	8,2 x 245	12,67	4,83	8,96
	173S82275	8,2 x 275	12,67	4,83	8,96
	173S82300	8,2 x 300	15,99	4,83	11,30
	173S82330	8,2 x 330	15,99	4,83	11,30