

WBS MINI > Vite orx testa svasata filetto parziale





Z.G.



Commerciale Dimensionale

Gamma	Q.tà	D1	L	Tfix	dk	ds	d2	tx
Codice	nr	Ø mm	mm	mm	mm	mm	mm	mm
1653520	500	3,5	20	15	7,0	2,45	2,25	T-15
1653530	500	3,5	30	18	7,0	2,45	2,25	T-15
1653540	500	3,5	40	25	7,0	2,45	2,25	T-15
1653550	500	3,5	50	25	7,0	2,45	2,45	T-15
1654030	500	4,0	30	18	8,0	2,75	2,65	T-20
1654040	500	4,0	40	25	8,0	2,75	2,65	T-20
1654045	500	4,0	45	25	8,0	2,75	2,65	T-20
1654050	500	4,0	50	30	8,0	2,75	2,65	T-20
1654060	500	4,0	60	35	8,0	2,75	2,65	T-20
1654070	500	4,0	70	40	8,0	2,75	2,65	T-20
1654540	250	4,5	40	24	9,0	3,15	2,80	T-20
1654550	250	4,5	50	25	9,0	3,15	2,80	T-20
1654560	250	4,5	60	35	9,0	3,15	2,80	T-20
1654570	250	4,5	70	40	9,0	3,15	2,80	T-20
1654580	250	4,5	80	50	9,0	3,15	2,80	T-20

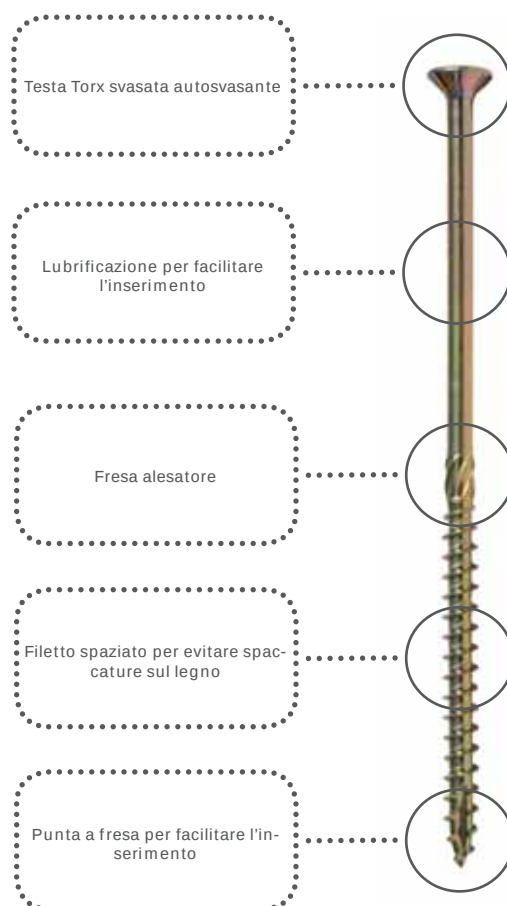

Tecnico

WBS > Valori statici

Gamma	Dimensioni							
Codice	d1 x L	Resistenza a trazione [kN]	Resistenza sotto-testa [kN]	Resistenza a taglio legno - legno [kN]		Resistenza a taglio acciaio - legno [kN]		
		Nt,rk	Nt,head,rk	Fv,rk 90°	Fv,rk	Acciaio [mm]	Fv,rk	Fv,rk 90°
1653520	3,5 x 20	0,57	0,49	0,73	0,71	1	0,72	0,73
1653530	3,5 x 30	0,69	0,49	0,76	0,74	1	0,72	0,73
1353540	3,5 x 40	0,95	0,49	0,82	0,79	1	0,73	0,74
1353550	3,5 x 50	0,95	0,49	0,82	0,79	1	0,76	0,77
1654030	4,0 x 30	0,85	0,64	0,98	0,96	2	0,95	0,96
1654040	4,0 x 40	1,18	0,64	1,05	1,02	2	0,96	0,97
1654045	4,0 x 45	1,18	0,64	1,05	1,02	2	0,96	0,97
1654050	4,0 x 50	1,42	0,64	1,11	1,07	2	0,97	0,97
1654060	4,0 x 60	1,66	0,64	1,16	1,11	2	0,97	0,98
1654070	4,0 x 70	1,90	0,64	1,21	1,16	2	0,98	0,99
1654540	4,5 x 40	1,25	0,81	1,25	1,21	2	1,20	1,21
1654550	4,5 x 50	1,30	0,81	1,26	1,22	2	1,20	1,21
1654560	4,5 x 60	1,83	0,81	1,38	1,32	2	1,22	1,22
1654570	4,5 x 70	2,09	0,81	1,44	1,38	2	1,22	1,23
1654580	4,5 x 80	2,61	0,81	1,56	1,48	2	1,24	1,25