



OV TOP > Ancoraggio



Alu




Commerciale	Dimensionale				
Gamma	L 1	L 2	S 1	D 1	D 2
Codice	mm	mm	mm	Ø 9	Ø 9
199OV040	40	104	20	1	3
199OV060	60	104	20	2	5
199OV100	100	104	20	2	6



Vite speciale per fissaggio



Tecnico

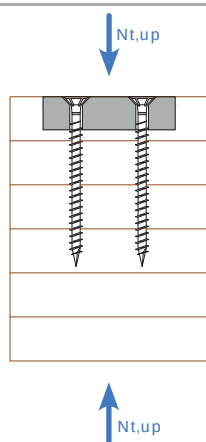

OV TOP > Valori statici viti legno testa

Viti	Ø Vite x L	Resistenze	Modelli OV TOP		
Codice	Ø mm	[kN]	OV 40	OV 60	OV 100
199OV8120	Ø8 x 120	Nt,rk	10,06	15,10	20,13
		Ntup,rk	2,40	3,60	6,00
199OV8140	Ø8 x 140	Nt,rk	11,86	17,79	23,72
		Ntup,rk	2,40	3,60	6,00
199OV8160	Ø8 x 160	Nt,rk	13,62	20,44	27,25
		Ntup,rk	2,40	3,60	6,00
199OV8180	Ø8 x 180	Nt,rk	15,11	23,05	27,82
		Ntup,rk	2,40	3,60	6,00
199OV8200	Ø8 x 200	Nt,rk	15,11	25,42	27,82
		Ntup,rk	2,40	3,60	6,00
199OV8220	Ø8 x 220	Nt,rk	15,11	25,42	27,82
		Ntup,rk	2,40	3,60	6,00