


SCHEMA TECNICA IBL

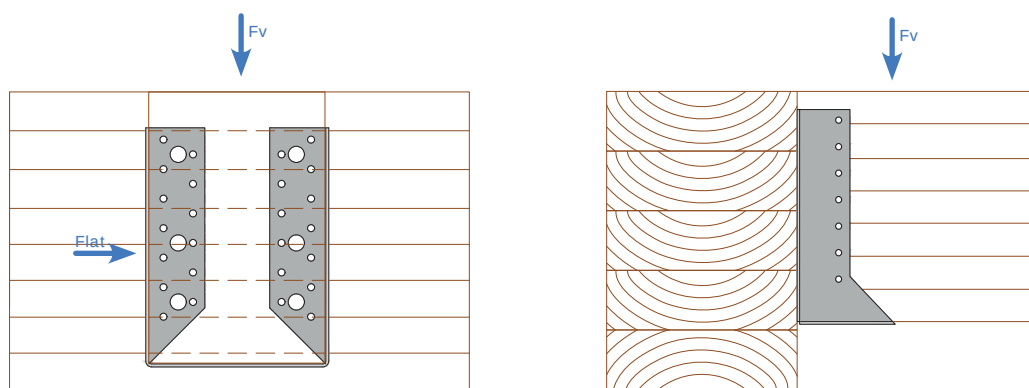

IBL > Valori statici

Gamma		Collegamento Legno - Legno								
Codice	L 1 x H [mm]	Chiodo Anker	Chiodatura totale				Chiodatura parziale			
		CK	D1 [n°]	D3 [n°]	Fv,rk [kN]	Flat,rk [kN]	D1 [n°]	D3 [n°]	Fv,rk [kN]	Flat,rk [kN]
1990601	80 x 120	Ø4 x 60	18	10	27,2	9,6	10	6	15,6	5,8
1990901	80 x 150	Ø4 x 60	22	16	33,1	10,7	12	6	18,9	5,8
1990902	80 x 180	Ø4 x 60	26	14	37,8	11,7	14	8	23,6	6,7
1990903	80 x 210	Ø4 x 60	30	16	42,5	12,5	16	8	23,6	6,7
1990602	100 x 140	Ø4 x 60	22	12	33,1	12,3	12	6	18,9	6,5
1990904	100 x 170	Ø4 x 60	26	14	37,8	13,5	14	8	23,6	7,7
1990905	100 x 200	Ø4 x 60	30	16	42,5	14,6	16	8	23,6	7,7
1990906	120 x 120	Ø4 x 60	18	10	27,5	11,7	10	6	15,6	7,0
1990603	120 x 160	Ø4 x 60	26	14	37,8	14,9	14	8	23,6	8,5
1990907	120 x 190	Ø4 x 60	30	16	42,5	16,2	16	8	23,6	8,5
1990908	140 x 140	Ø4 x 60	22	12	33,1	14,3	12	6	18,9	7,4
1990604	140 x 180	Ø4 x 60	30	16	42,5	17,5	16	8	23,6	9,1

IBL > Valori statici

Gamma		Collegamento Cemento - Legno					
Codice	L 1 x H	Chiodo Anker CK		BF481 + GF400PLUS		Fv,rk legno [kN]	Fv,rk acciaio [kN]
		D3 [n°]	Ø x L	D2 [n°]	Ø x L		
1990601	80 x 120	10	Ø4 x 60	4	Ø10 x 120	28,3	24,0
1990901	80 x 150	16	Ø4 x 60	4	Ø10 x 120	42,5	24,0
1990902	80 x 180	14	Ø4 x 60	6	Ø10 x 120	37,7	36,0
1990903	80 x 210	16	Ø4 x 60	6	Ø10 x 120	42,5	36,0
1990602	100 x 140	12	Ø4 x 60	4	Ø10 x 120	33,0	24,0
1990904	100 x 170	14	Ø4 x 60	6	Ø10 x 120	37,7	36,0
1990905	100 x 200	16	Ø4 x 60	6	Ø10 x 120	42,5	36,0
1990906	120 x 120	10	Ø4 x 60	4	Ø10 x 120	28,3	24,0
1990603	120 x 160	14	Ø4 x 60	6	Ø10 x 120	37,7	36,0
1990907	120 x 190	16	Ø4 x 60	6	Ø10 x 120	42,5	36,0
1990908	140 x 140	12	Ø4 x 60	4	Ø10 x 120	33,0	24,0
1990604	140 x 180	16	Ø4 x 60	6	Ø10 x 120	42,5	36,0